

# Beverage Systems

## CO2 Detector Test (Ax60)

|                            |             |
|----------------------------|-------------|
| Frequency                  | Weekly      |
| Model                      | Analox Ax60 |
| Estimated Time to Complete | 10 Minutes  |

Card No. BE005A

### Health & Safety Hazards



Asphyxia



Compressed Gases/Liquids

### Food Safety




Wash and dry hands **after** performing this task



Inspect equipment. Do not use if damaged

Original design of Ax60

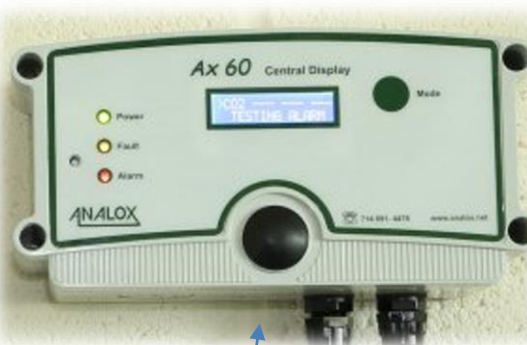

#### Detector Unit (Sensor)

Located at low level near CO2 Tank or Multiplex


#### Central Display Unit

Located in Manager's Office

#### Alarm Sounder & Strobe Unit

Located at high level outside room or area containing a Detector

New design of Ax60  
(installed from July 2015 onwards)

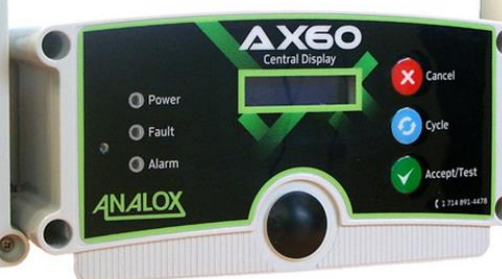

Two people are required to complete the weekly detector test:

- Person 1 remains in front of and operates the main Ax60 Central Display Unit (usually located in the manager's office).
- Person 2 confirms activation of each combined Alarm Sounder / Strobe unit.

A list giving the number and location of detector units for the restaurant can be found above the Central Display Unit.

**Inform customers and employees that you are about to test one of the alarm systems before commencing.**

**1**

Person 1:  
Stand in front of the Alarm Sounder & Strobe Unit for the first location on the list above the Central Display Unit

**2**

Person 2:  
a) For the 'original design' Ax60 - press and hold the "Mode" button on the Central Display Unit for 5-10 seconds; or  
b) For the 'new design' Ax60 - press and hold the "Accept/Test" button on the Central Display Unit for 5-10 seconds.

**3**

Person 1:  
Check that the Sounder (siren) and the Strobe (bright flashing light) are both operational for the first detector location.

**4**

Repeat steps 1 to 3 until all Alarm Sounder & Strobe Units in the restaurant have been tested.

**5**

For the '**new design**' Ax60 **ONLY**:  
Check that the large blue strobe light on the kitchen wall activates during each test.

Note: this separate strobe will not activate during the weekly test for any 'original design' Ax60 units. Operation of this strobe will be checked by Air Products as part of inspection visits.

**6**

Check all warning and alarm action signs are displayed. An alarm instruction notice must be displayed next to the Central Display Unit and next to each Alarm Sounder & Strobe Unit.

If any alarm sounder/strobe units fail to activate during the test, call Air Products immediately on 01905 758300.

Replacement signs and posters can be ordered from Air Products